


APPULIS

PASSENGER CATALOG

2014



Manufacture Equipments

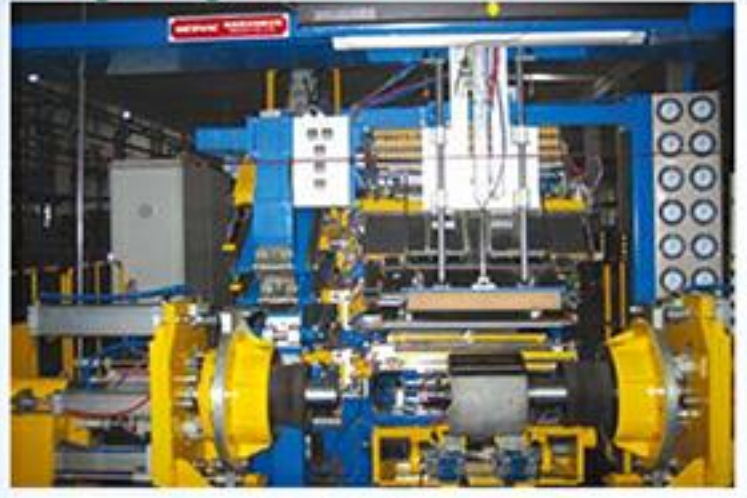



CATCHGRE GP100 UTQG:360 A A



Sizes Description	L.I. & S.I. Index	Tread Depth
155/65R13	73T	7.30
155/70R13	75T	7.30
155/80R13	79T	7.30
165/65R13	77T	7.30
165/70R13	79T	7.30
165/80R13	83T	7.30
175/60R13	77H	7.30
175/70R13	82T	7.30
185/70R13	86T	7.50
155/65R14	75H	7.30
165/60R14	75H	7.30
165/65R14	79H	7.30
165/70R14	81H/85Txl	7.30
175/65R14	82H/86Txl	7.30
175/70R14	84H/88Txl	7.30
185/55R14	80H	7.50
185/60R14	82H	7.50
185/65R14	86H	7.50
185/70R14	88H	7.50
195/60R14	86H	7.50
195/70R14	91H/95Txl	7.50
205/60R14	88H	7.80

Sizes Description	Load Index	Tread Depth
205/70R14	95T	7.80
175/55R15	77H	7.50
175/60R15	81H	7.50
175/65R15	84H	7.50
185/55R15	82V/86Vxl	7.50
185/60R15	84H/88Hxl	7.50
185/65R15	88H/92Txl	7.50
195/60R15	88H/88V	7.50
195/65R15	91V/95Hxl	7.50
205/60R15	91V/95Hxl	7.80
205/65R15	94H/94V	7.80
205/70R15	96H	7.80
215/65R15	96H	8.00
215/70R15	98H	8.00
225/70R15	100T	8.00
235/70R15	103T	8.00
205/55R16	91V	7.80
205/60R16	92H/96Vxl	7.80
215/60R16	95V/99Hxl	8.00
215/65R16	98H	8.00
225/60R16	98H	8.00
235/60R16	100H	8.00



A-PLUS

Economic PCR

Catchgre GP100



Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.



Continuous tread blocks on both shoulder give great support to enhance the stability when cornering, the closed shoulders deliver excellent quiet ride.



Continuous solid center ribs and lateral tread blocks connected by rib-in-chain enhance steering stability, decrease block deformation and reduce energy loss.



Special tread compound delivers excellent grip on both dry and wet roads and offer longer mileage.





CATCHPOWER

UTQG:300 A A



Sizes Description	L.I. & S.I. Index	Tread Depth
195/45R15	78V	8.00
195/50R15	82V	8.00
195/55R15	85V	8.00
185/55R16	87Vxl	8.00
195/45R16	84Vxl	8.00
195/50R16	88Vxl	8.00
195/55R16	91Vxl	8.00
205/45R16	87Wxl	8.00
205/50R16	87W	8.00
205/55R16	94Wxl	8.00
215/55R16	97Wxl	8.00
225/55R16	99Wxl	8.00
205/40R17	84Wxl	8.00
205/45R17	88Wxl	8.00
205/50R17	93Wxl	8.00
215/40R17	87Wxl	8.00
215/45R17	91Wxl	8.00
215/50R17	95Wxl	8.00
215/55R17	98Wxl	8.00
225/45R17	94Wxl	8.00
225/50R17	98Wxl	8.00
225/55R17	101Wxl	8.00
235/45R17	97Wxl	8.00
235/50R17	99Wxl	8.00
235/55R17	103Wxl	8.00
245/45R17	99Wxl	8.00
215/35R18	84Wxl	8.00
215/40R18	89Wxl	8.00
225/40R18	92Wxl	8.00

Sizes Description	Load Index	Tread Depth
225/45R18	95Wxl	8.00
235/40R18	95Wxl	8.00
235/45R18	98Wxl	8.00
235/50R18	101Wxl	8.00
245/40R18	97Wxl	8.00
245/45R18	100Wxl	8.00
245/50R18	100W	8.00
255/35R18	97Wxl	8.00
255/40R18	99Wxl	8.00
255/45R18	103Wxl	8.00
215/35R19	85Wxl	8.00
225/35R19	88Wxl	8.00
235/35R19	91Wxl	8.00
245/35R19	93Wxl	8.00
245/40R19	98Wxl	8.00
255/40R19	100Wxl	8.00
225/30R20	85Wxl	8.00
225/35R20	93Wxl	8.00
245/30R20	97Wxl	8.00
245/35R20	95Wxl	8.00
255/35R20	97Wxl	8.00
275/30R20	97Wxl	8.00
275/35R20	102Wxl	8.00
235/30R22	90Wxl	8.00
245/30R22	92Wxl	8.00
255/30R22	95Wxl	8.00
245/30R24	95Wxl	8.00
255/30R24	97Wxl	8.00
275/25R24	96Wxl	8.00





Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.



Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage



Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.



Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.



Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.



Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage



Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.



Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.



CATCHFORS A/T UTQG: 480 A B



Sizes Description	L.I. & S.I. Index	Tread Depth
P215/75R15	100S	9.00
P235/75R15	105S	9.00
P215/70R16	100T	9.00
P225/70R16	103T	9.00
P235/70R16	106T	9.00
P245/70R16	107T	9.00
P255/70R16	111T	9.50
P265/70R16	112T	9.50
P275/70R16	114T	9.50
P225/65R17	102T	9.00
P235/65R17	104T	9.00
P245/65R17	107T	9.00
P245/70R17	110T	9.00
P255/65R17	110T	9.50
P265/65R17	112T	9.50
P265/70R17	115T	9.50
P275/65R17	115T	9.50
P275/65R18	116T	9.50

Sizes Description	Load Index	Tread Depth
LT31X10.5R15	109S	11.50
LT215/85R16	115/112S	11.50
LT225/75R16	115/112S	11.50
LT235/85R16	120/116S	12.00
LT245/75R16	120/116S	11.50
LT265/75R16	123/120S	12.00
LT285/75R16	122/119S	12.00
LT265/70R17	121/118S	12.00
215R15C	109/107S	11.50
245/75R15C	107/105S	11.50

Remark: White Letter Styling

All Terrain


Catchfors A/T



Four main zigzag grooves and rough lateral blocks provide excellent traction on all kinds of road conditions.



The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.

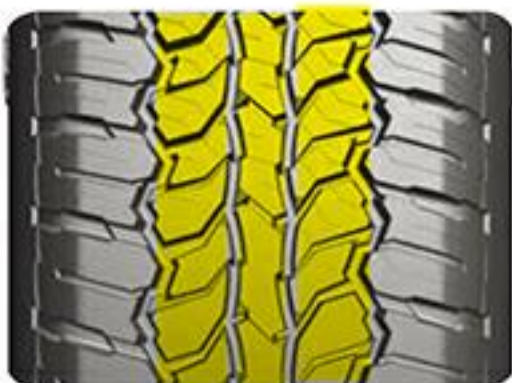

The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.



Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



PERFORMAX

UTQG:420 A A



Sizes Description	L.I. & S.I. Index	Tread Depth
235/70R16	106H	8.50
245/70R16	107H	8.50
255/65R16	109H	8.50
255/70R16	111H	8.50
265/70R16	112H	8.50
275/70R16	114H	8.50
215/60R17	96H	8.50
225/60R17	99H	8.50
225/65R17	102H	8.50
235/60R17	103Hxd	8.50
235/65R17	108Hxd	8.50
245/65R17	107H	8.50
255/65R17	110H	8.50
265/65R17	112H	8.50
265/70R17	115H	8.50
275/65R17	115H	8.50
235/55R18	103Hxd	8.50
235/60R18	107Hxd	8.50

Sizes Description	Load Index	Tread Depth

Highway Terrain

Performax



Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.



The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.



Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.



High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.





CATCHFORS M/T



Sizes Description	L.I. & S.I. Index	Tread Depth
LT30X9.5R15	104Q	13.50
LT31X10.5R15	109Q	13.50
LT33X12.5R15	108Q	13.50
LT35X12.5R15	113Q	13.50
LT235/85R16	120/116Q	13.50
LT245/75R16	120/116Q	13.50
LT265/75R16	123/120Q	13.50
LT285/75R16	122/119Q	13.50
LT265/70R17	121/118Q	13.50
LT285/70R17	121/118Q	13.50

Sizes Description	Load Index	Tread Depth

Max Traction

Catchfrs M/T



Three main zigzag grooves and aggressive pattern design provide outstanding traction on all kinds of road conditions.



High void ratio and open shoulder offer excellent resistance to aquaplaning and self-cleaning performance.



The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition. Special casing profile and solid shoulder pattern enhance the max traction and cornering performance.



Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.





MILE MAX



Sizes Description	L.I. & S.I. Index	Tread Depth
175/65R14C	90/88T	8.00
165/70R14C	89/87T	8.00
185R14C	102/100R	8.50
195R14C	106/104R	8.50
195R15C	106/104R	8.50
195/70R15C	104/102R	9.00
205/70R15C	106/104R	9.00
215/70R15C	109/107R	9.50
225/70R15C	112/110R	9.50
185/75R16C	104/102R	9.00
195/60R16C	99/97T	9.00
195/65R16C	104/102T	9.00
195/75R16C	107/105R	9.00
205/65R16C	107/105T	9.00
205/75R16C	110/108R	9.00
215/60R16C	103/101T	9.50
215/65R16C	109/107T	9.50
215/75R16C	113/111R	9.50
225/65R16C	112/110T	9.50
235/65R16C	115/113T	9.50

Sizes Description	Load Index	Tread Depth
155R12C	88/86Q	8.00
155R13C	90/88Q	8.00

Commercial Van

Mile Max



Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.



Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.



Variable pitch patterns and multi-knife-cut tread pattern reduce vibration to offer the comfort and quiet ride.



Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.





PRIMETOUR

UTQG:420 A A



Sizes Description	L.I. & S.I. Index	Tread Depth	Re-Mark
P185/75R14	89S	8.50	WSW
P195/75R14	92S	8.50	WSW
P205/75R14	95S	8.50	WSW
P205/70R15	95S	8.50	WSW
P205/75R15	97S	8.50	WSW
P215/70R15	98S	8.50	WSW
P215/75R15	100S	8.50	WSW
P225/70R15	100S	8.50	WSW
P225/75R15	102S	8.50	WSW
P235/75R15	105S	8.50	WSW



TOURING MAX



Sizes Description	L.I. & S.I. Index	Tread Depth	Re-Mark
5.00R12C	88/86Q	8.50	WSW
5.50R13C	97/95Q	8.50	WSW
185R14C	102/100R	8.50	WSW
195R14C	106/104R	8.50	WSW
185R15C	103/102R	8.50	WSW
195R15C	106/104R	8.50	WSW
205/75R14C	106/104R	8.50	WSW
205/75R15C	106/104R	8.50	WSW
155R12C	88/86Q	8.00	WSW
155R13C	90/88Q	8.00	WSW

Pattern Family



Asian Tyre Sourcing



Economic PCR



Performance



Highway Terrain



All Terrain



Max Traction



White Sidewall



Commercial Van



Light Truck

The Winter patterns are coming in 2014.

WARRANTY

APLUS quality tires sold by Asian Tyre Sourcing are warranted through the manufacturers which produce them, to be free of defects in workmanship and material-related conditions. Asian Tyre Sourcing is not the manufacturer of the tires, and is not the source of the manufacturer's warranty for the tires.

No statement or other representation contained herein shall be construed as creating any additional warranties or obligations on behalf of Asian Tyre Sourcing for the tires. The manufacturer's warranty is extended to the first retail purchaser.

The warranty is valid as long as there is at least 2/32nds of original tread remaining in all positions of the tire. Tires which have less than 2/32nds of original tread remaining are considered to have delivered their original life and are not subject to warranty or adjustment.

The following is not covered under the warranty:

- Road Hazards (including, but not limited to, punctures, cuts, snags, impact breaks)
- Wrecks
- Collisions
- Fire
- Improper inflation
- Overloading
- Improper mounting or de-mounting
- Damage as a result of improper operation or maintenance, including, but not limited to, causing excessive operational temperatures that exceed the tire's capabilities
- Mechanical condition of vehicle
- Ride disturbance after less than 2/32nds of original tread remaining
- Altered tires
- Weather cracking on tires more than 2 years old
- Loss of time, inconvenience, loss of use of vehicle, incidental or consequential damages
- Tires older than 3 years will not be eligible for warranty or adjustment unless agreed upon by manufacturer

Damages and Claims

All damages and claims involving tires sold by Asian Tyre Sourcing are to be submitted to Asian Tyre Sourcing through the initial dealer sold by Asian Tyre Sourcing.

No claims will be processed if submitted by a customer, consumer or sub-dealer of an Asian Tyre Sourcing customer.

Adjustment Procedures

In order to process your claim you must follow the procedures below:

- Completed Asian Tyre Sourcing Claim Form (size, tire description, description of defect, remaining tread depth, serial no.).
- Contact your salesperson should you require a claim form.
- 2 clear pictures, one which clearly shows the defect and one picture of the overall tire.
- Remove the factory serial # along with the DOT# from the tire and attach them to each picture.
- Must be submitted to Asian Tyre Sourcing within 30 days of the date received from your customer.
- Tires which are more than 36 months old will be subject to review and possible refusal of claim.
- Out of Round tires will only be honored within the first 1/32nds of wear.
- Tires need to be held until clearance given to dispose of them.

Credits will be based on the price paid for said tire or the latest price being paid, whichever is less.

Credits will not include local taxes, additional freight paid or any other miscellaneous expenses. Credits are pro-rated on the remaining tread depth.

Once a credit has been applied to your account a deduction can then be taken on the next invoice due.

No cash refunds will be offered for credits unless agreed upon in writing by Asian Tyre Sourcing.



Asian Tyre Sourcing

A=PLUS

Distributed by:



Asian Tyre Sourcing

**Guangfa Financial Building - Office # 2504
No. 40 Shandong Road,
Qingdao China 266071
Tel. + 86 (532) 85019128
sales@asiantyresourcing.com**